

EXTRACTION METHOD FOR STOKES FLOW WITH JUMPS IN THE PRESSURE

KWANG SUNG CHANG AND DO YOUNG KWAK


Abstract. In this paper, we consider a stationary, constant viscosity, incompressible Stokes flow with singular forces along one or several interfaces. Assuming only the jumps of the pressure are present along the interface, we develop a new numerical scheme for such a problem. By constructing an approximate singular function and removing it, we can apply a standard finite element method to solve it. A main advantage of our scheme is that one can use a uniform grid. We observe optimal $O(h)$ order for the pressure and $O(h^2)$ order for the velocity.

Key Words. Stokes equation, singular forces, jumps in the solution, extraction method, discontinuous pressure, uniform grid.

1. Introduction

In recent years, interface problems have become the subject of extensive research [7, 8, 12, 14, 15, 17, 18, 24, 26]. Many interesting physical phenomena are described by the underlying partial differential equations having interface. For example, when two or more distinct materials or fluid with different conductivities, densities or permeability are involved, model equations often involve discontinuous coefficients to reflect the physical properties [1, 9, 10, 11, 16, 20]. Often, the solutions of these interface problems must satisfy certain interface jump conditions due to physical conservation laws. Many numerical methods to deal with such problems have been proposed [19, 21, 22, 23]. Because of discontinuity of the solutions, standard numerical methods do not yield accurate solutions even when fitted grids are used [13, 22, 25].

In this paper, we propose an accurate, fast finite element method for Stokes problems with pressure jump conditions across a given interface which divides the domain into two parts. Any regular finite element meshes including uniform meshes are allowed. The idea is to consider certain singular function in a neighborhood of the interface whose jumps match the given jump conditions. By subtracting this function from the variational form, we obtain a new variational problem in which the solution has no jumps. To develop a numerical scheme, we choose one such singular function and construct its approximation. The process consists of two main steps: First, we construct a piecewise linear function satisfying the jump conditions in a small strip near the interface. Then we extend it into the whole region in some reasonable way. One of the natural methods is to solve a harmonic/biharmonic equation in one of the subdomains. It is quite natural to use finite element methods; However, the usual piecewise linear continuous finite element cannot be used because of discontinuity of the data near the interface. Instead, Crouzeix-Raviart (CR)

FIGURE 1. Sketch of the domain Ω for the interface problem

nonconforming element [2, 3, 4] which uses the midpoint of each edge as degree of freedom is appropriate in this case (see Section 4.1 for details).

The next step is to subtract it from the variational formulation of Stokes problem which leads to standard variational form of Stokes problem. Some advantages of our scheme are:

- We can use uniform mesh which is very efficient for moving interface such as time dependent problem.
- Neither do we need adaptive mesh nor do we need extra degrees of freedom such as XFEM [22], yet our method achieve $O(h^2)$ for velocity and $O(h)$ for pressure, which is optimal with lowest order finite element.
- The cost of constructing the discrete singular part is cheap since the work is equivalent to solving a Laplace problem in a subdomain.
- After subtracting the singular part, the remaining task is equivalent to solving standard Stokes equation, hence it can be incorporated into the existing software.

The outline of the paper is as follows: We start the formulation of the problem in Section 2, continued by a brief discussion of the removing singularity in the weak form of the Stokes equation. Section 3,4 describe the extraction method and its numerical scheme. In Section 5, some numerical results are shown. Conclusions follow in Section 6.

2. Model Stokes problem

Let $\Omega \subset \mathbb{R}^2$ be a convex polygonal domain. The domain Ω is separated into two subdomains Ω^- and Ω^+ with $\bar{\Omega} = \bar{\Omega}^- \cup \bar{\Omega}^+$ and $\Omega^- \cap \Omega^+ = \emptyset$. We assume that Ω^- and Ω^+ are connected and $\partial\Omega^- \cap \partial\Omega^+ = \emptyset$. The interface is denoted by $\Gamma = \bar{\Omega}^- \cap \bar{\Omega}^+$. Let

$$(1) \quad \begin{aligned} H_0^1(\Omega) &:= \{v \in H^1(\Omega) : v = 0 \text{ on } \partial\Omega\}, \\ L_0^2(\Omega) &:= \{q \in L^2(\Omega) : \int_{\Omega} q = 0\}. \end{aligned}$$

Then, we want to find the solution $(\mathbf{u}, p) \in H_0^1(\Omega)^2 \times L_0^2(\Omega)$ of the stationary homogeneous Stokes problem for an incompressible viscous fluid confined in Ω satisfies:

$$\begin{aligned} (2a) \quad & -\mu\Delta\mathbf{u} + \nabla p = \mathbf{g} + \mathbf{F}, & \text{in } \Omega, \\ (2b) \quad & \nabla \cdot \mathbf{u} = 0, & \text{in } \Omega, \\ (2c) \quad & \mathbf{u} = \mathbf{0}, & \text{on } \partial\Omega. \end{aligned}$$

with $p = p(\mathbf{x})$ the pressure, $\mathbf{u} = \mathbf{u}(\mathbf{x})$ the velocity, μ the constant viscosity, $\mathbf{g} \in L^2(\Omega)$ and $\mathbf{F} \in H^{-1}(\Omega)$, the external singular force. By [5],[6], this problem has a unique solution $(\mathbf{u}, p) \in H_0^1(\Omega)^2 \times L_0^2(\Omega)$. The external singular force can be written as

$$\mathbf{F} \equiv (F_1(x, y), F_2(x, y)) = \int_{\Gamma} \mathbf{f}(s) \delta(\mathbf{x} - \mathbf{X}(s)) \, ds,$$

where $\mathbf{X}(s)$ denotes the interface parameterized by s , $\mathbf{f}(s)$ is the force strength at this point, and δ is the two-dimensional delta function. In general, this singular force leads to the jumps of the pressure and the velocity. However, dealing with those jumps for both the velocity and pressure is a heavy task, no one seems to have resolved it completely yet. Hence, in this paper, we restrict our attention to a rather simple case where the jumps are restricted to the pressure only. So, we assume that the jumps of the pressure on the interface Γ are given by

$$(3) \quad [p]_{\Gamma} = J_1(\mathbf{x}), \quad \left[\frac{\partial p}{\partial \mathbf{n}} \right] = J_2(\mathbf{x}).$$

Now, we define the related (affine) spaces. Let $D^+ := D \cap \Omega^+$, $D^- := D \cap \Omega^-$ and define

$$\begin{aligned} H_P^m(D) &:= H^m(D^+) \cap H^m(D^-), \\ \mathcal{P}^{m;(\gamma_1, \gamma_2)}(D) &:= \left\{ p \in H_P^m(D) \mid [p] = \gamma_1, \left[\frac{\partial p}{\partial \mathbf{n}} \right] = \gamma_2 \text{ on } D \cap \Gamma \right\}, \\ \mathcal{P}_0^{m;(\gamma_1, \gamma_2)}(D) &:= \{ p \in \mathcal{P}^{m;(\gamma_1, \gamma_2)}(D) \mid p = 0 \text{ on } \partial D \}, \end{aligned}$$

with a piecewise norm

$$\|p\|_{H_P^m(D)}^2 := \|p\|_{H^m(D^+)}^2 + \|p\|_{H^m(D^-)}^2.$$

Here, for any domain in D , $H^m(D)$ is the usual Sobolev space of order m . Considering the jump conditions, we decompose p as

$$(4) \quad p = p^0 + p^*$$

where $p^0 \in H^1(\Omega) \cap L_0^2(\Omega)$ and $p^* \in \mathcal{P}^{1;(\gamma_1, \gamma_2)}(\Omega)$. In other words, p is splitted into regular part p^0 and singular part p^* . Using Green's theorem on each subdomains $\Omega^{\pm}$, we get

$$(5) \quad \int_{\Omega^{\pm}} \nabla p \cdot \mathbf{v} \, d\mathbf{x} = - \int_{\Omega^{\pm}} p \nabla \cdot \mathbf{v} \, d\mathbf{x} + \int_{\partial \Omega^{\pm}} p \mathbf{v} \cdot \mathbf{n} \, ds.$$

Multiply a test function $\mathbf{v}$ in (2a) and integrating by part in each subdomain Ω^+ and Ω^- , we obtain a weak formulation of our problem as follows: find $(\mathbf{u}, p^0) \in H_0^1(\Omega)^2 \times L_0^2(\Omega)$ such that

$$(6a) \quad a(\mathbf{u}, \mathbf{v}) + b(\mathbf{v}, p^0) = (\mathbf{g}, \mathbf{v}) - b(\mathbf{v}, p^*) - \langle J_1, \mathbf{v} \cdot \mathbf{n} \rangle_{\Gamma}, \quad \forall \mathbf{v} \in H_0^1(\Omega)^2,$$

$$(6b) \quad b(\mathbf{u}, q) = 0, \quad \forall q \in L^2(\Omega),$$

where

$$a(\mathbf{u}, \mathbf{v}) := \int_{\Omega} \mu \nabla \mathbf{u} : \nabla \mathbf{v} \, d\mathbf{x}, \quad b(\mathbf{v}, q) := - \int_{\Omega} q \nabla \cdot \mathbf{v} \, d\mathbf{x},$$

$$(\nabla \mathbf{u} : \nabla \mathbf{v}) := \text{tr}(\nabla \mathbf{u} \nabla \mathbf{v}).$$

The resulting equation is the variational form of a standard Stokes equation with modified right hand side. The problem now is how to find an approximation to p^* and approximate variational form. We will answer this question in the next section.

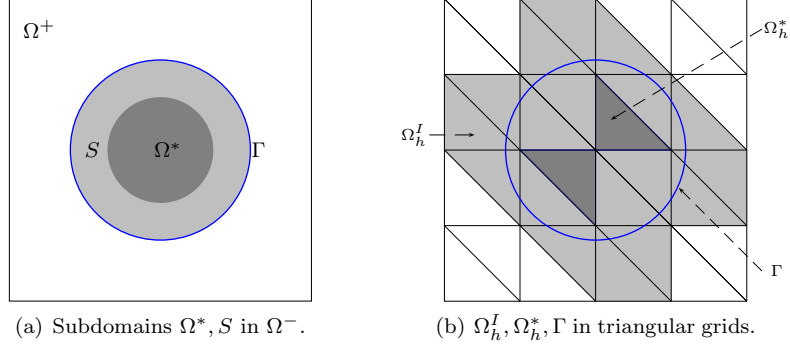


FIGURE 2. Some subdomains in Extraction method

3. Extraction Method

Taking the divergence of the equation (2a) in each subdomain, we obtain the Poisson equation for the pressure:

$$(7) \quad \nabla^2(p^0 + p^*) = \Delta(p^0 + p^*) = \nabla \cdot \mathbf{g}.$$

We may split this equation into two equations

$$(8a) \quad \Delta p^0 = G_2 \quad \text{in } \Omega, \quad p^0 \in H^1(\Omega) \cap L_0^2(\Omega),$$

$$(8b) \quad \Delta p^* = G_1 \quad \text{in } \Omega^- \cup \Omega^+, \quad p^* \in \mathcal{P}_0^{1;(J_1, J_2)}(\Omega),$$

for some G_1 and G_2 . Since p^* has jump across Γ , the equations (8b) hold in Ω^+ and Ω^- respectively, while (8a) holds in Ω . But solving this system numerically is not an easy task, since such a splitting is not unique and furthermore, p^* has two interface conditions. In this paper, we propose the following method: First, we consider a narrow strip contained in Ω^- whose outer boundary coincides with Γ (see Figure 2(a)). Choose any function satisfying jump conditions and restrict it to S (call it p^E). Then we extend it into the whole Ω^- by solving the following equation

$$(9) \quad \begin{aligned} \Delta p^* &= 0 & \text{in } \Omega^- \setminus S =: \Omega^*, \\ p^* &= p^E & \text{on } \partial\Omega^*. \end{aligned}$$

Finally, set $p^* = 0$ on Ω^+ . We call this scheme an *Extraction Method (EM)*. The remaining task is to find a finite dimensional approximation to p^* .

4. Numerical Scheme

Let $\mathcal{T}_h$ be the usual quasi-uniform finite element triangulations of the domain Ω . For any element $T \in \mathcal{T}_h$, we call an element T an *interface element* if the interface Γ passes through the interior of T , otherwise we call T a *non-interface element* and we call an edge $e \in \partial T$ an *interface edge* if the interface Γ passes through the interior of e , otherwise we call e a *non-interface edge*. Now, we introduce some

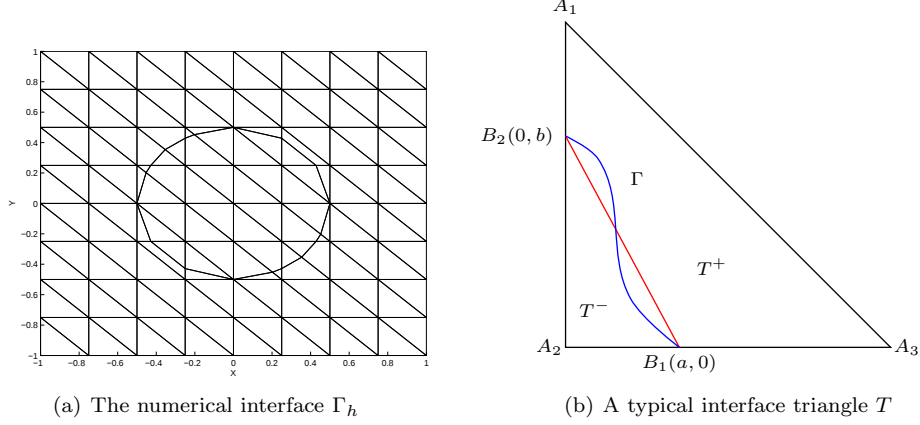


FIGURE 3. Interface elements in the triangular mesh.

notations:

$$\begin{aligned}
 \partial^I T &= \text{the set of all interface edges of an element } T, \\
 \mathcal{T}_h^I &= \text{the set of all interface elements,} \\
 \mathcal{T}_h^N &= \text{the set of all non-interface elements,} \\
 \Omega_h^I &= \bigcup_{T \in \mathcal{T}_h^I} T, \\
 \Omega_h^- &= \bigcup_{T \in \mathcal{T}_h} T^-, \\
 \Omega_h^* &= \Omega_h^- \setminus \Omega_h^I.
 \end{aligned}$$

Even though the interface Γ is a curve in general, we replace the part of interface in T by the line segment connecting the intersection points with ∂T . Therefore, the interface Γ is replaced by its polygonal approximation Γ_h . Henceforth, Γ is always assumed to be Γ_h (see Figure 3(a)).

4.1. Construction of p_h^* . We construct p_h^* in two steps. First, we will consider p_h^* in Ω_h^I . Suppose T is an interface element. For simplicity, we assume the three vertices are given by $A_1 = (0, 1)$, $A_2 = (0, 0)$, $A_3 = (1, 0)$ (see Figure 3(b)). For any element T in general position, all the constructions to be presented below carries over through affine equivalence. Assume the interface meets with the element's edges at points B_1 and B_2 .

Let ℓ_i be the usual linear Lagrange nodal basis function associated with the vertex A_i for $i = 1, 2, 3$. Then $\ell_1 = y$, $\ell_2 = 1 - x - y$, $\ell_3 = x$. In the domain Ω_h^I , we write ψ^* as the following form:

$$(10) \quad \psi^* = \begin{cases} \psi^{*-} &= \alpha_1 \ell_1 + \alpha_2 \ell_2 + \alpha_3 \ell_3 & \text{in } T^-, \\ \psi^{*+} &= 0 & \text{in } T^+. \end{cases}$$

Now imposing the jump conditions on Γ , we have:

$$(11a) \quad \psi^{*-}(B_1) - \psi^{*+}(B_1) = J_1(B_1),$$

$$(11b) \quad \psi^{*-}(B_2) - \psi^{*+}(B_2) = J_1(B_2),$$

$$(11c) \quad \frac{\partial \psi^{*-}}{\partial \mathbf{n}} - \frac{\partial \psi^{*+}}{\partial \mathbf{n}} = J_2(B_0),$$

where B_0 is the midpoint of $\overline{B_1 B_2}$. Then we have three unknowns α_i , $i = 1, 2, 3$ in three equations (11a,b,c). Thus we can find coefficients $\{\alpha_{i=1,2,3}\}$. Note that two end points of the line segment Γ_{seg} are located on the interface Γ , and hence the interface condition $[p](\mathbf{x}) = J_1(\mathbf{x})$ is enforced exactly at these two end points, i.e., the point jump conditions (11a,b) gives

$$\begin{aligned} (1-a)\alpha_2 + a\alpha_3 &= J_1(B_1), \\ b\alpha_1 + (1-b)\alpha_2 &= J_1(B_2). \end{aligned}$$

The second condition on the interface segment Γ_{seg} is the flux continuity. Hence, the derivative jump condition (11c) becomes

$$(\alpha_1 \nabla \ell_1 + \alpha_2 \nabla \ell_2 + \alpha_3 \nabla \ell_3) \cdot \mathbf{n}_{\overline{B_1 B_2}} = J_2(B_0).$$

Since these conditions are represented by the following matrix equation:

$$(12) \quad \begin{bmatrix} 0 & 1-a & a \\ b & 1-b & 0 \\ a & -a-b & b \end{bmatrix} \begin{pmatrix} \alpha_1 \\ \alpha_2 \\ \alpha_3 \end{pmatrix} = \begin{pmatrix} J_1(B_1) \\ J_1(B_2) \\ J_2(B_0) \end{pmatrix} =: \begin{pmatrix} J_1 \\ J_2 \\ \wp \end{pmatrix},$$

the coefficient α_i 's of ψ^* are determined by the following formula:

$$(13) \quad \psi^* : \begin{cases} \alpha_1 &= (b(b-1)J_1 + (a^2+b)J_2 - a(-b-1)\wp)/K \\ \alpha_2 &= (b^2J_1 + a(aJ_2 - b\wp))/K \\ \alpha_3 &= ((a+b^2)J_1 + (a-1)(aJ_2 - b\wp))/K \end{cases}$$

where $K = a^2 + b^2$. We do this for every $T \in \Omega_h^I$. Having constructed p_h^E on Ω_h^I (lightly shaded region in Figure 2(b)), we now need to extend it into Ω_h^* (dark shaded region in Figure 2(b)), which will be done by solving the Laplace equation

$$(14) \quad \begin{aligned} \Delta p^* &= 0 && \text{in } \Omega_h^*, \\ p^* &= p_h^E && \text{on } \partial\Omega_h^*, \end{aligned}$$

numerically. Numerical methods for this problem are well known; However, due to the discontinuity in the boundary data p_h^E on $\partial\Omega_h^*$, the usual nodal finite element space cannot be used. Instead, one can use Crouzeix-Raviart P_1 -nonconforming finite element space[5] where the linear basis function has the degrees of freedom at the midpoints of edges. We denote it by $\dot{P}_h$. The finite element solution of (14) on Ω_h^* is denoted by p_h^* . Together with the construction above on Ω_h^I , we have obtained p_h^* in Ω_h^- .

4.2. Variational form after removing p_h^* . In this section, we explain how to remove the discrete singular part p_h^* from the weak formulation (6). First of all, we define some discrete spaces:

$$\begin{aligned} P_h^0 &:= \{p \in L_2(\Omega_h) \mid p|_T \text{ is constant for every } T \in T_h\}, \\ \hat{P}_h^I &:= \{p \in L_2(\Omega_h^I) \mid p|_{T^\pm} \text{ is linear for every } T \in T_h^I\}, \\ \dot{P}_h(D) &:= \{p \in L_2(D) \mid p \text{ is linear for every } T \cap D, T \in T_h, \\ &\quad p \text{ is continuous at the midpoints of the triangle edges}\}, \\ P_h^E &:= \hat{P}_h^I \oplus \dot{P}_h(\Omega_h^*), \\ \mathbf{V}_h &:= (\dot{P}_h(\Omega_h))^2. \end{aligned}$$

We now replace p^* in (6) by p_h^* , but not without caution: Since p_h^* is now discontinuous along edges of T , we include line integrals. Thus we replace (6a) by the following form

$$(15) \quad a(\mathbf{u}, \mathbf{v}) + b(\mathbf{v}, p^0) = (\mathbf{g}, \mathbf{v}) - b(\mathbf{v}, p_h^*) + \mathcal{J}(\mathbf{v}, p_h^*),$$

where

$$\mathcal{J}(\mathbf{v}, p_h^*) := - \langle [p_h^*], \mathbf{v} \cdot \mathbf{n} \rangle_\Gamma + \sum_{T \in \mathcal{T}_h^I} \int_{\partial^I T} p_h^* \mathbf{v} \cdot \mathbf{n} \, ds.$$

The resulting equation can be solved again by a standard finite element method for Stokes problem: The simplest and most natural finite element method in this setting is the Crouzeix-Raviart finite element pair $\mathbf{V}_h \times P_h^0$. Thus, we have the following discrete Stokes problem: Find $(\mathbf{u}_h, p_h^0) \in \mathbf{V}_h \times P_h^0$ such that

$$\begin{aligned} (16a) \quad a_h(\mathbf{u}_h, \mathbf{v}_h) + b_h(\mathbf{v}_h, p_h^0) &= (\mathbf{g}, \mathbf{v}_h) - b_h(\mathbf{v}_h, p_h^*) + \mathcal{J}(\mathbf{v}_h, p_h^*), \quad \forall \mathbf{v}_h \in \mathbf{V}_h, \\ (16b) \quad b_h(\mathbf{u}_h, q_h) &= 0, \quad \forall q_h \in P_h^0, \end{aligned}$$

where

$$a_h(\mathbf{u}_h, \mathbf{v}_h) := \sum_{T \in \mathcal{T}} \int_T \mu \nabla \mathbf{u}_h : \nabla \mathbf{v}_h \, d\mathbf{x}, \quad b_h(\mathbf{v}_h, q_h) := - \sum_{T \in \mathcal{T}} \int_T q_h \nabla \cdot \mathbf{v}_h \, d\mathbf{x}.$$

5. Numerical experiments

In all of the experiments, the domain is a square and triangularized by uniform triangle grids with $h_x = h_y = 1/2^{n-1}$ for $n = 3, \dots, 8$. In order to describe the interface, we consider the level-set function $\Phi(\mathbf{x})$ for the interface Γ which is assumed to be smooth. Let $\Phi : \Omega \rightarrow \mathbb{R}$ be a continuous function such that

$$(17) \quad \Phi(\mathbf{x}) = \begin{cases} < 0 & \mathbf{x} \text{ in } \Omega^-, \\ = 0 & \mathbf{x} \text{ on } \Gamma, \\ > 0 & \mathbf{x} \text{ in } \Omega^+. \end{cases}$$

We assume that $\Phi(\mathbf{x})$ is smooth and $\nabla \Phi$ is not zero in any neighborhood of the interface Γ . Then the unit normal vector $\mathbf{n}(\mathbf{x})$ is represented by $\frac{\nabla \Phi}{|\nabla \Phi|}$. The experiments in this subsection show that the method is robust.

Example 1 (Constant Jump). *The level-set function $\Phi(\mathbf{x})$, the jumps of the pressure and the boundary condition of the velocity are given as follows:*

$$\begin{aligned} \Phi(\mathbf{x}) &= \sqrt{(x-0.5)^2 + (y-0.5)^2} - 0.25, \\ p &= \begin{cases} 150(x-1/2)(y-1/2), & \text{in } \Omega^+ \\ 150(x-1/2)(y-1/2) + 30, & \text{in } \Omega^- \end{cases} \\ \mathbf{u} &= \begin{cases} u_1 = -256x^2(x-1)^2y(y-1)(2y-1), \\ u_2 = 256y^2(y-1)^2x(x-1)(2x-1), & \text{in } \Omega^\pm \end{cases} \\ \mathbf{u} &= \mathbf{0} \quad \text{on } \partial\Omega. \end{aligned}$$

with the domain $\Omega = [0, 1] \times [0, 1]$.

We observe the robust first order for the pressure and second order convergence for the velocity with L^2 -norm.

TABLE 1. (Constant jump) 1st order for the pressure and 2nd order for the velocity with $\|\cdot\|_{L^2}$

$N_x \times N_y$	$\ p - p_h\ _{L^2}$	Order	$\ u - u_h\ _{L^2}$	Order
8×8	5.1852×10^{-0}	-	1.6315×10^{-1}	-
16×16	2.0473×10^{-0}	1.34	4.7486×10^{-2}	1.78
32×32	8.1309×10^{-1}	1.33	1.2568×10^{-2}	1.92
64×64	3.6409×10^{-1}	1.16	3.2055×10^{-3}	1.97
128×128	1.7276×10^{-1}	1.07	8.0694×10^{-4}	1.99
256×256	8.6181×10^{-2}	1.00	2.0220×10^{-4}	2.00

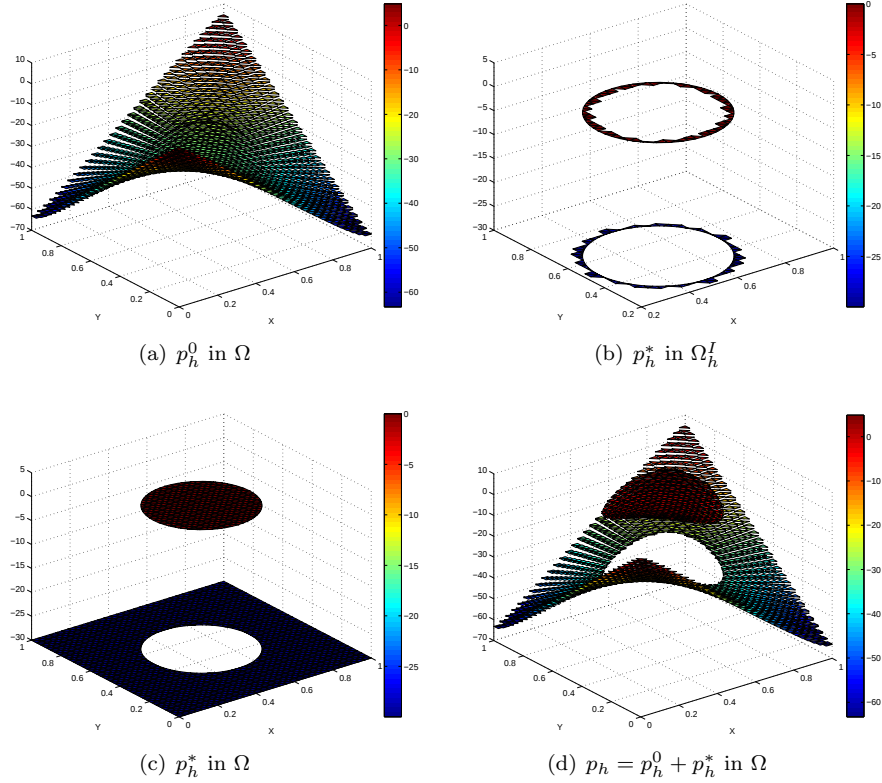


FIGURE 4. p_h^0 , p_h^* , p_h in the constant jump case.

Example 2 (Noncontant Jump). *The level-set function $\Phi(\mathbf{x})$, the jumps of the pressure and the boundary condition of the velocity are given as follows:*

$$\begin{aligned}
 \Phi(\mathbf{x}) &= \sqrt{x^2 + y^2} - 0.5, \\
 [p]_\Gamma &= 20 \sin(x^2 y) - x^2 y, \\
 \left[\frac{\partial p}{\partial \mathbf{n}} \right]_\Gamma &= 3x^2 y (20 \cos(x^2 y) - 1), \\
 \mathbf{g} &= \begin{cases} 20x \cos(x^2 y) (2y, x), & \text{in } \Omega^- \\ x(2y, x), & \text{in } \Omega^+ \end{cases}, \\
 \mathbf{u} &= \mathbf{0} \quad \text{on } \partial\Omega.
 \end{aligned}$$

with the domain $\Omega = [-1, 1] \times [-1, 1]$.

We again have similar optimal convergence behavior.

TABLE 2. (Nononstant jump) 1st order for the pressure and 2nd order for the velocity with $\|\cdot\|_{L^2}$

$N_x \times N_y$	$\ p - p_h\ _{L^2}$	Order	$\ u - u_h\ _{L^2}$	Order
8×8	2.4718×10^{-1}	-	1.6473×10^{-2}	-
16×16	9.5051×10^{-2}	1.38	4.8611×10^{-3}	1.76
32×32	4.2345×10^{-2}	1.17	1.5310×10^{-3}	1.67
64×64	2.0367×10^{-2}	1.06	4.2185×10^{-4}	1.86
128×128	1.0152×10^{-2}	1.00	1.0879×10^{-4}	1.96
256×256	5.0738×10^{-3}	1.00	2.7698×10^{-5}	1.97

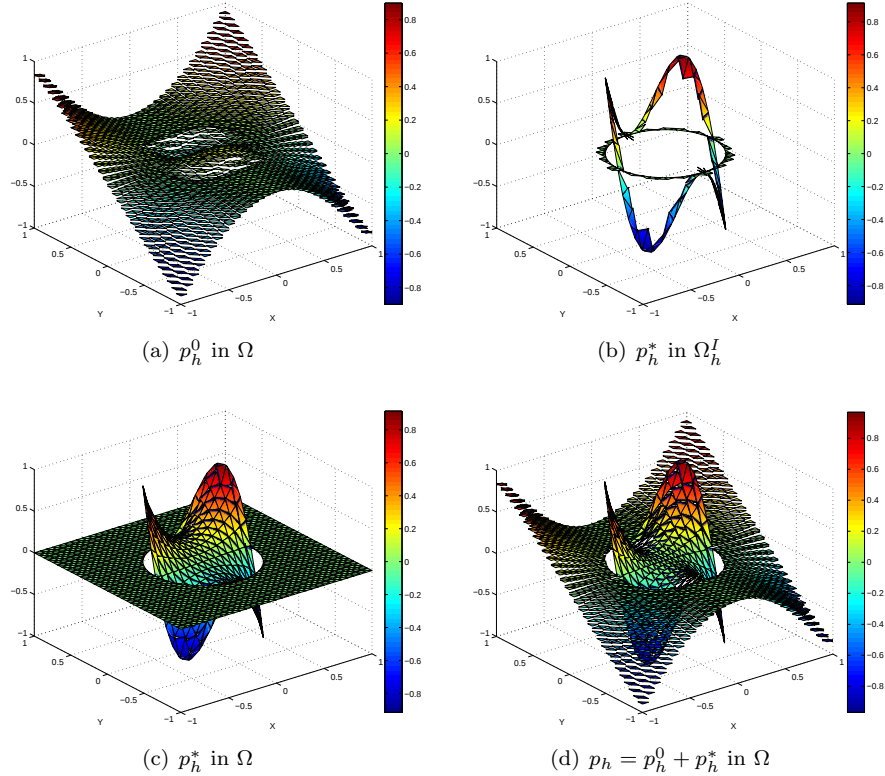


FIGURE 5. p_h^0 , p_h^* , p_h in the nonconstant jump case.

6. Conclusions

In this paper, we have introduced a new numerical method of solving Stokes interface problems having jumps in the pressure. The first step is to construct a piecewise linear function having small support in Ω_h^- near the interface which satisfy the jump conditions. The second step is to extend it into Ω_h^* by solving a discrete Laplace equation with P_1 -nonconforming finite element. Then removing it

from the original variational form, we obtain a Stokes problem with no jumps. The equation is then solved with the Crouzeix-Raviart nonconforming finite element pair. Our scheme is very effective since we can use any shape regular grid, not necessarily fitted grid. We have provided some numerical examples which show the optimal $O(h^2)$ error for velocity and $O(h)$ for pressure.

References


- [1] I. Babuska, *The finite element method for elliptic equations with discontinuous coefficients*, Computing, 5, (1970), pp. 207-213.
- [2] M. Crouzeix and P. A. Raviart, *Conforming and nonconforming finite element methods for solving the stationary Stokes equations*, RAIRO Anal. Numer., (1973), pp. 33-75.
- [3] P. G. Ciarlet, *The finite element method for elliptic problems*, North Holland, 1978.
- [4] V. Girault and P. A. Raviart, *Finite element methods for Navier-Stokes equations. Theory and algorithms.*, Springer-Verlag, Berlin, 1986.
- [5] V. Girault and P.A. Raviart, *Finite element methods for naiver-stokes equations: theory and algorithms*, Springer Series in Computational Mathematics 5, 1986.
- [6] F. Brezzi, M. Fortin, *Mixed and hybrid finite element methods*, Springer, New York, (1991)
- [7] R. J. LeVeque and Z. Li, *The immersed interface method for elliptic equations with discontinuous coefficients and singular sources*, SIAM J. Numer. Anal., 31, (1994), pp. 1019-1044.
- [8] J. H. Bramble and J. T. King, *A finite element method for interface problems in domains with smooth boundary and interfaces*, Adv. Comp. Math., 6, (1996), pp. 109-138.
- [9] R. J. Leveque and Z. Li, *Immersed interface methods for stokes flow with elastic boundaries or surface tension*, SIAM J. Sci. COMPUT. Vol. 18, No. 3, pp. 709-735, May (1997)
- [10] E.G. Puckett, A.S. Almgren, J.B. Bell, D.L. Marcus, W.J. Rider, *A high-order projection method for tracking fluid interfaces in variable density incompressible flow*, J. Comput. Phys. 130 (1997) 269.
- [11] M. Rudman, *Volume-tracking methods for interfacial flow calculations*, Int. J. Numer. Meth. Fluids 24 (1997) 671.
- [12] Z. Chen and J. Zou, *Finite element methods and their convergence for elliptic and parabolic interface problems*, Numer.Math., 79, (1998), pp. 175-202.
- [13] N. Moes, J. Dolbow, T. Belytchko, *A finite element method for crack growth without remeshing*, Int. J. Number, Meth, Eng. 46(1999) 131-150
- [14] Rachel Caiden, Ronald P. Fedkiw and Chris Anderson, *A Numerical Method for Two-Phase Flow Consisting of Separate Compressible and Incompressible Regions*. Journal of Computational Physics 166, 1-27 (2001)
- [15] Tao Ye, Wei Shyy and Jacob N. Chung, *A Fixed-Grid, Sharp-Interface Method for Bubble Dynamics and Phase Change*. Journal of Computational Physics 174, 781-815 (2001)
- [16] M. Renardy, Y. Renardy, J. Li, *Numerical simulation of moving contact lines using a volume-of-fluid method*, J. Comput. Phys. 171 (2001) 243.
- [17] G. Tryggvason, B. Bunner, A. Esmaeeli, D. Juric, N. Al-Rawahi, W. Tauber, J. Han, S. Nas and Y.-J. Jan, *A Front-Tracking Method for the Computations of Multiphase Flow*. Journal of Computational Physics 169, 708-759 (2001)
- [18] T. Lin, Y. Lin, R. C. Rogers, L. M. Ryan, *A rectangular immersed finite element method for interface problems*, Advances in computation, 7 (2001), pp. 107-114.
- [19] J. A. Sethian and P. Smereka, *Level set methods for fluid interfaces*, Annu. Rev. Fluid Mech., (2003), 35:341-72.
- [20] R. V. Davalos, B. Rubinskya, L. M. Mirb, *Theoretical analysis of the thermal effects during in vivo tissue electroporation*, Bioelectrochemistry 61, (2003), pp. 99-107.
- [21] S. Hou and X. Liu, *A numerical method for solving variable coefficient elliptic equation with interfaces*, J. Comput. Phys. 202, (2005), no. 2, pp. 411-445.
- [22] S. Grob and A. Reusken, *An extended pressure finite element space for two-phase incompressible flows with surface tension*, J. Comput. Phys., 224, (2007), pp. 44-58.
- [23] Matched interface and boundary (MIB) method for elliptic problems with sharp-edged interfaces, J. Comput. Phys., 224, (2007), pp. 729-756.
- [24] Y. Gong, B. Li and Z. Li, *Immersed-interface finite-element methods for elliptic interface problems with nonhomogeneous jump conditions*, SIAM J. Numer. Anal., 46, (2008), no. 1, pp. 472-495.


- [25] A. Gerstenberger, W. A. Wall, *An extened Finite Element method/Lagrange multiplier based approach for fluid-structure interaction*, Comput. Methods Appl. Mech. Engrg. 197 (2008), pp. 1699-1714.
- [26] S. H. Chou, Do Y. Kwak and K. T. Wee, *Optimal Convergence Aanalysis of an Immersed Interface Finite Element Method*, accepted in Advances in Comp. Math. (2009).


Department of Mathematical Sciences, Korean Society for Industrial and Applied Mathematics(KAIST), 335 Gwahangno (373-1 Guseong-dong), Yuseong-gu, Daejeon 305-701, Republic of Korea


E-mail: ckslove@kaist.ac.kr and kdy@kaist.ac.kr

URL: <http://mathsci.kaist.ac.kr/~dykwak/>

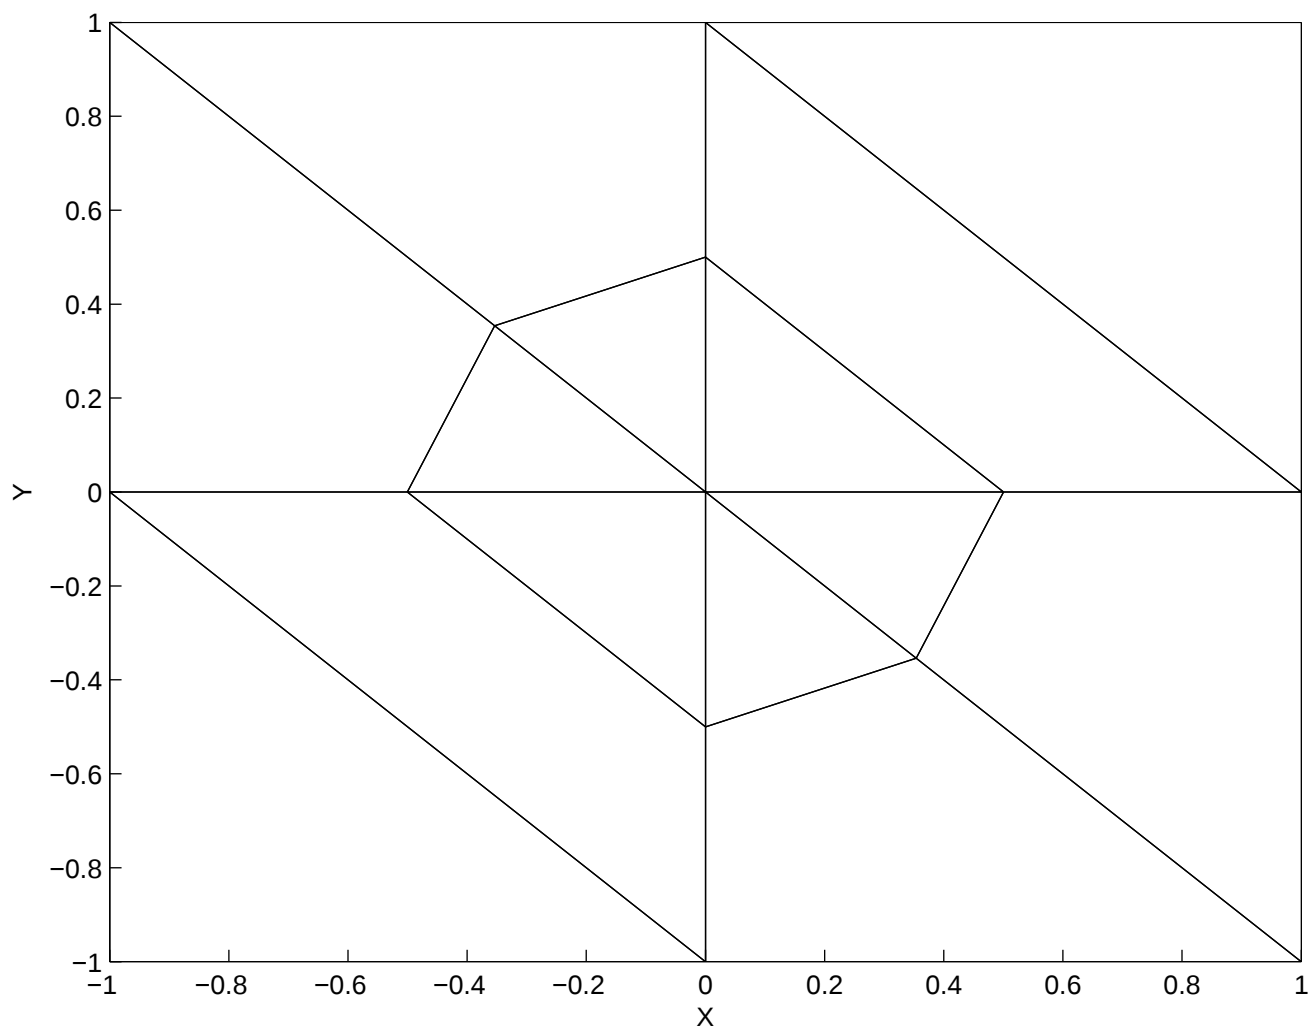

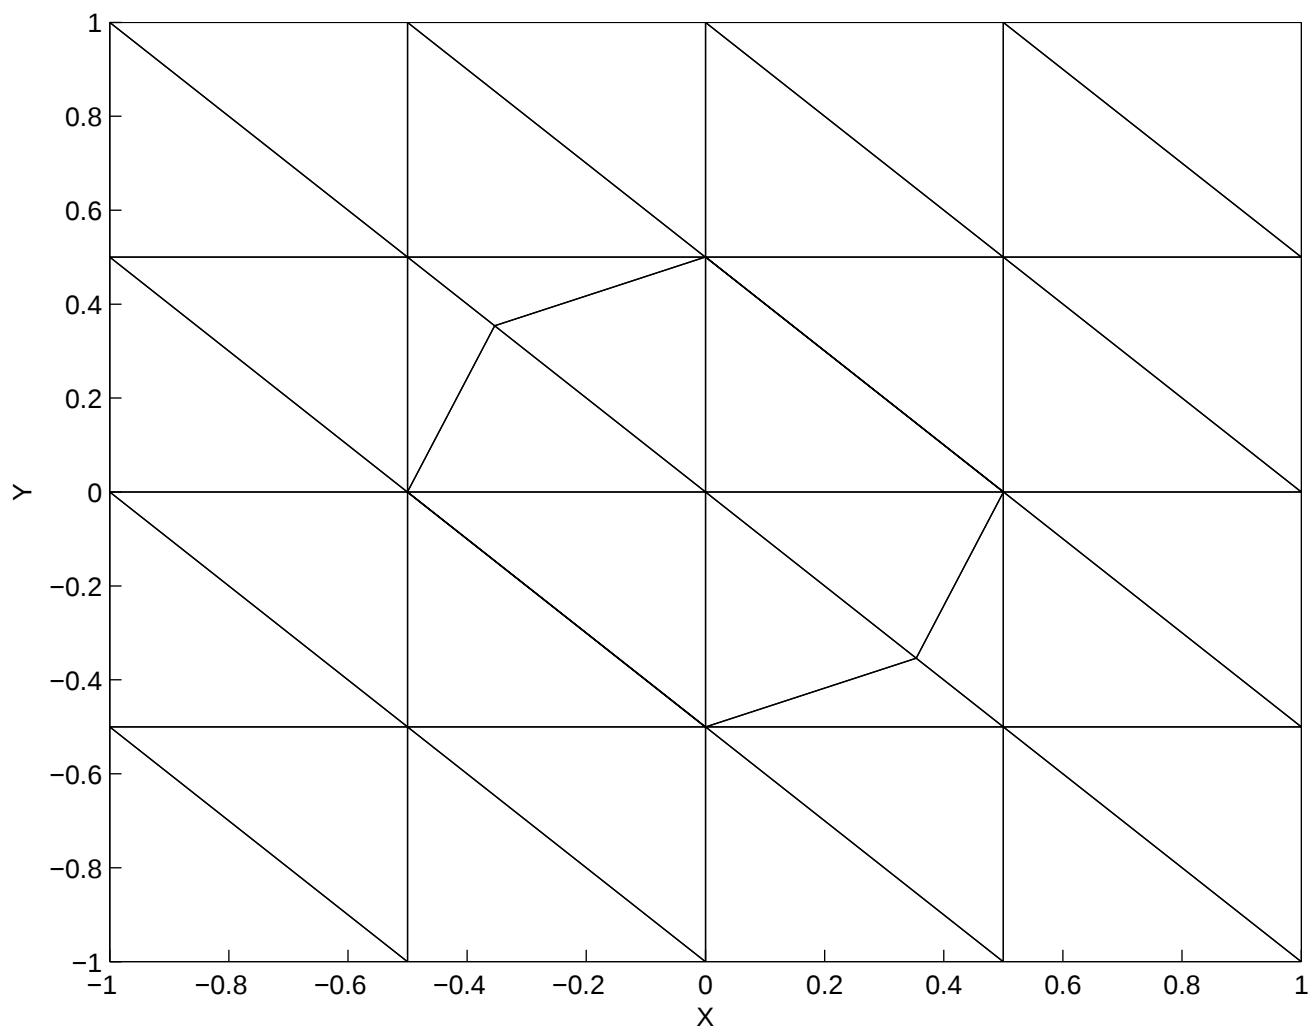

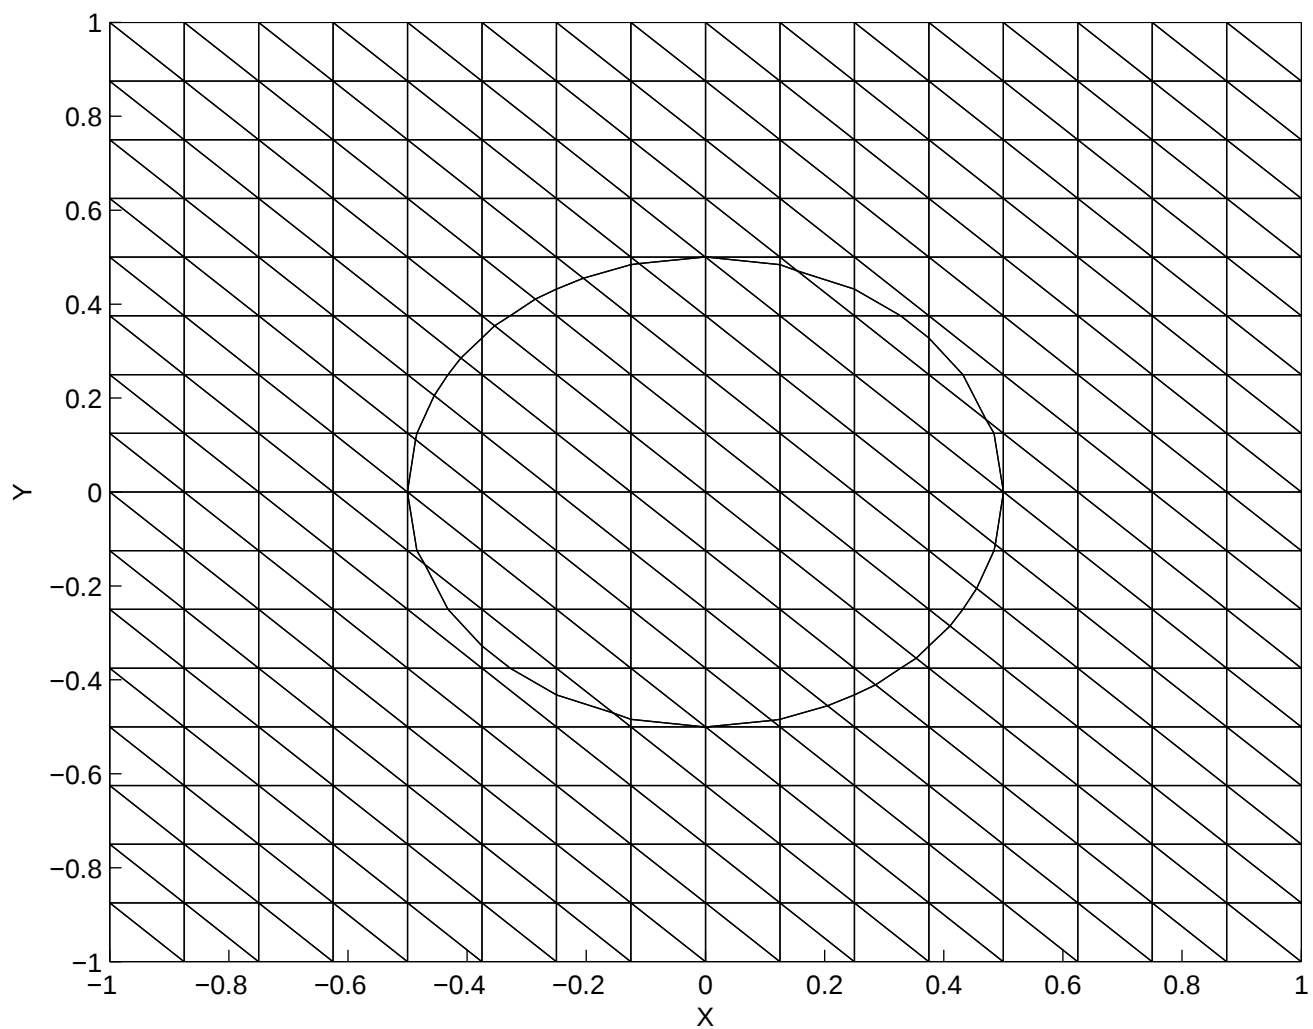

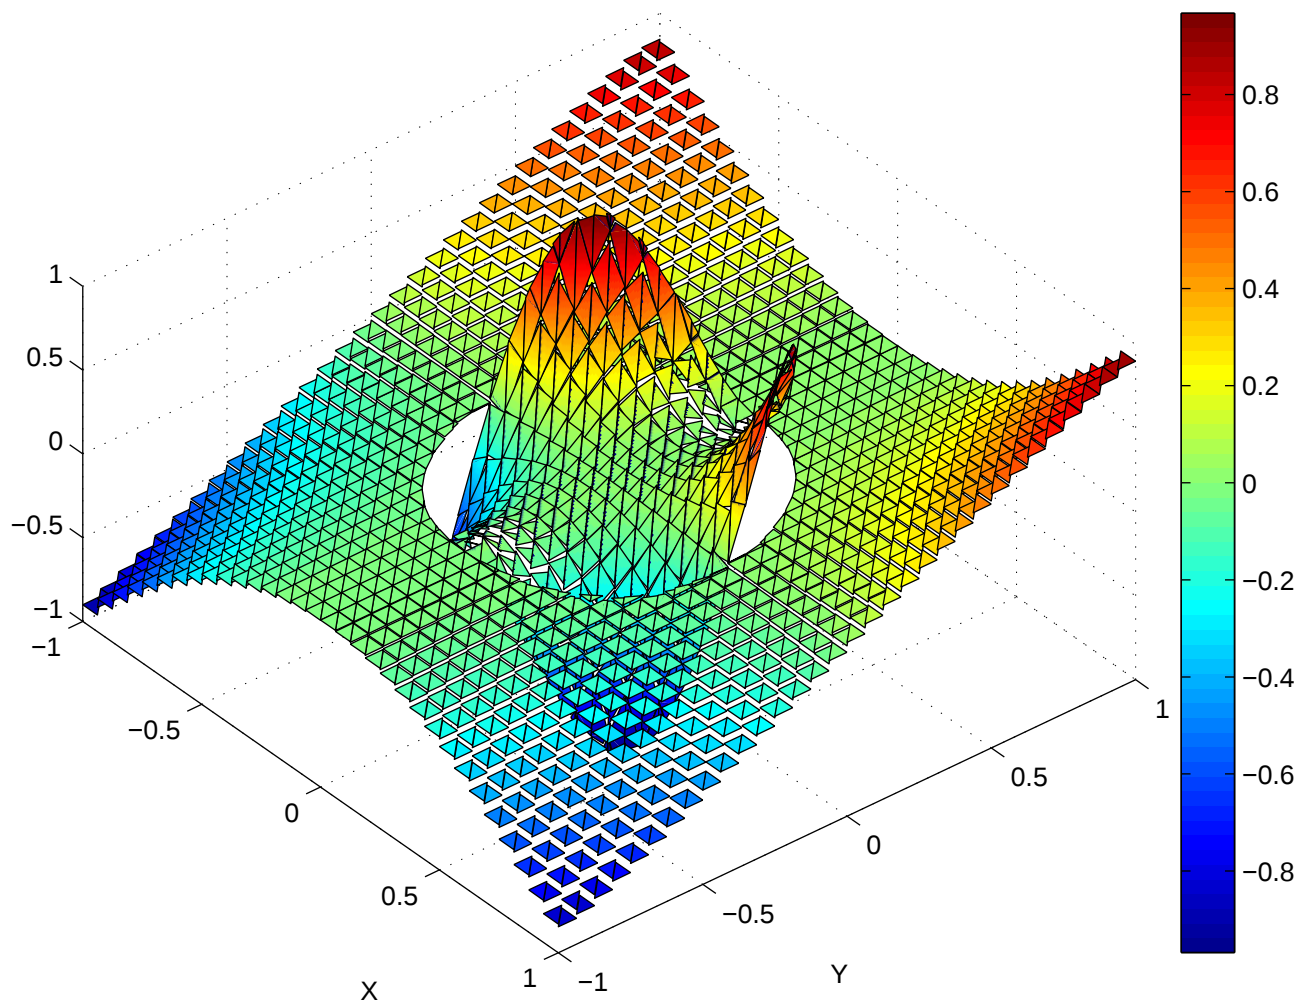

ENTER THE TITLE OF YOUR PAPER HERE
IF IT IS TOO LONG, YOU CAN USE
TO BREAK IT INTO SEVERAL LINES

FULL NAME, FULL NAME 1, AND FULL NAME 2

(Communicated by Hilbert)

This paper is dedicated to our authors

Abstract. This paper is a sample prepared to illustrate the use of `ijnam.cls`.
You can use all commands of `amsart.cls`.

Key Words. point, line, plane, and space.

1. First section

This is the first section.

2. Second section

This is the second section.

2.1. This section has two subsections. This is the first subsection of the second section.

2.2. The second subsection. This is the first subsection of the second section.

2.2.1. The second subsection has two subsubsections. This is the first sub-subsection of the second subsection.

2.2.2. The second subsubsection. This is the second subsubsection of the second subsection.

For $b = 1$, $c = 4$, we get from (??)

3. Forth section

This is the forth section.

4. Third section

This is the last section.

Acknowledgments

The author thanks the anonymous authors whose work largely constitutes this sample file. This research was supported by ???.

Received by the editors January 1, 2004 and, in revised form, March 22, 2004.
2000 *Mathematics Subject Classification.* 35R35, 49J40, 60G40.
This research was supported by ???

References

- [1] A. Friedman, Partial Differential Equations of Parabolic Type , Robert E. Krieger Publishing Company, Malabar, Florida, 1983.
- [2] R. Glowinski, J. L. Lions and R. Trémoières, Numerical Analysis of Variational Inequalities, North-Holland Publishing Company, 1981.
- [3] O. A. Ladyzenskaya, V. A. Solonnikov and N. N. Uralceva, Linear and Quasi-linear Equations of Parabolic Type, AMS, 1988.
- [4] J. L. Lions and E. Magenes, Non-Homogeneous Boundary Value Problems and Applications I-II, Springer-Verlag, New York, 1972.

Department of Mathematics, University of Newland, Newland, NL 88888, USA

E-mail: hyang@louisiana.edu

URL: <http://www.uclousiana.edu/~hxy6615/>

Department of Mathematics, University of Newland, Newland, NL 88888, USA

E-mail: yang@louisiana.edu and hong@louisiana.edu

URL: <http://www.uclousiana.edu/~hxy6615/> and <http://www.uclousiana.edu/~hxy6615/>

